

FROMM

**Stretch Wrapping machine's
Series FS4xx / FS3xx / FS1xx**

3 PIN PLUG 250V a.c. 10A
Item No N52.2134

Website : www.fromm-stretch.com


FROMM Wrapping Systems s.r.l.
 N52.2134
 3 PIN PLUG 250V a.c. 10A



Clipsal Australia Pty Ltd
 A member of Schneider Electric
 33-37 Port Wakefield Road,
 Gepps Cross, SA 5094
 Clipsal Australia Pty Ltd
 The identified trademarks and copyrights
 are the property of Clipsal Australia Pty Ltd
 unless otherwise noted
 Made in Vietnam

FROMM Wrapping Systems s.r.l.
N52.2134
3 PIN PLUG 250V a.c. 10A

Stripping Dimensions (actual size in mm)

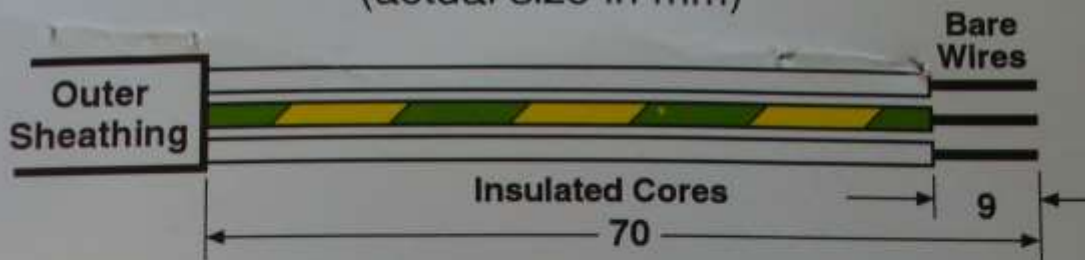


Wiring Instructions

1. Slip cord grip nut (small end first) and cover over flexible cord.
2. Connect EARTH wire with GREEN/YELLOW stripes (or all GREEN) to EARTH terminal marked "E" and with GREEN indication.
3. Connect BROWN (or RED) wire to ACTIVE terminal marked "A".
4. Connect BLUE (or BLACK) wire to NEUTRAL terminal marked "N".
5. Ensure all wires are securely looped under the cord grip hooks.
6. **Double check that EARTH wire is connected to EARTH terminal.**
7. Fit cover and tighten cord grip nut.

Safety Precautions

Ensure EARTH wire with GREEN/YELLOW stripes (or all GREEN) is connected to EARTH terminal marked "E" and with GREEN indication.

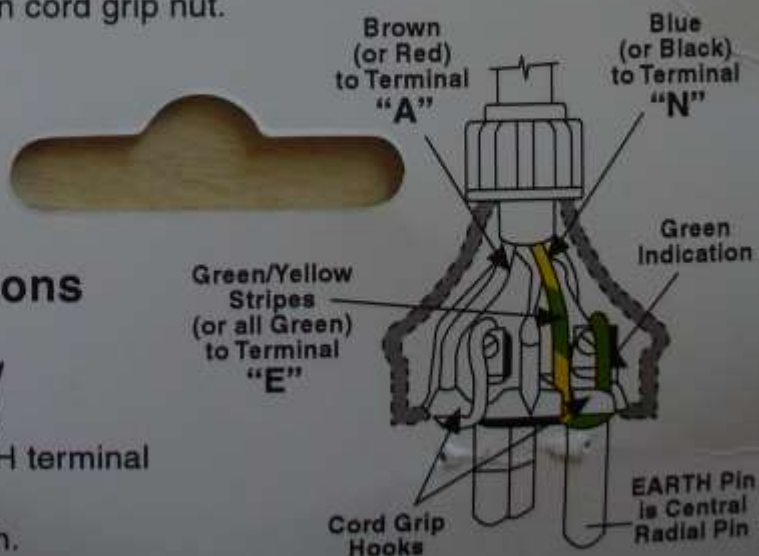

Assembly Instructions



Fig. 1



Fig. 2



Fig. 3

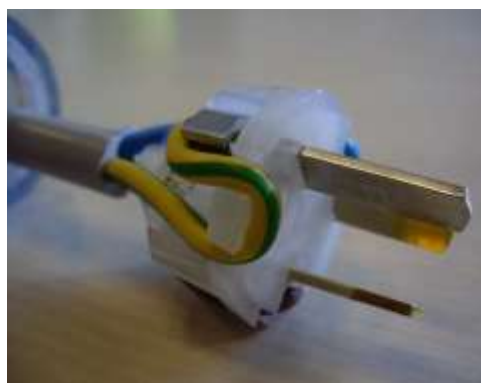


Fig. 4



Fig. 5



Fig. 6



Fig. 7



Fig. 8