



Group discharge electrostatic energy FS4.xxx item FS4.0183

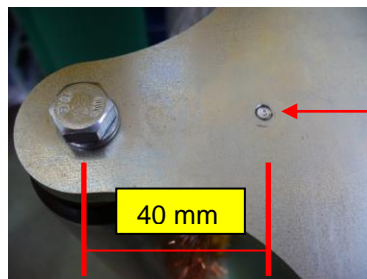

To drill with point of 3.3mm in addition, apply thread M4.
In top and bottom bracket.

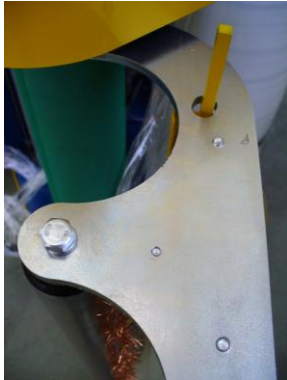

2x N11.1115 Cylindrical head screw cl. 8.8 UNI 5931 DIN 912 M4x8 zincd

2x N1.6219 Spring lock washer DIN 127 -B- UNI 1751/52A M4 zincd

2x N5.2145 Ringform 4-6 mm², M4, 650/4A Klauke

1x N5.3127 Antistatic cable **L=575mm**

