

TECHNICAL DATA SHEET

STRETCH UNIT CARRIAGE 1 (C0 – Code 16.8440-V02)


Carriage 16.8440

The film is tensioned between carriage and pallet. Tension “stretch” between 0 and 50% depending on film quality. Suitable for medium – high pallet weights from 150 to 2000kg. **(Figure 1 / 2 / 3 / 4)**

The tension can be adjusted by rotating the wheel (1) which is pressing against a pin (2). This Pin (2) has been inserted in high quality braking block (3). Inside the braking block (3) we have also inserted an high quality spring (4) to absorb eventual wearing during the working process. The complete tension can be released by changing the handle (5) for up to the downwards position. **(Fig 1 & 2)**

This carriage can be used in those cases where the client wants to wrap with thin or pre-stretched film, max 500mm width. (Minimal width 250mm)

Positive test have also been made with special net film. This material is normally used for products such as vegetables, fruit, flowers and eggs, which are subject to rotting and which cannot be wrapped airtight. **(Figure 3 Example net-film)**

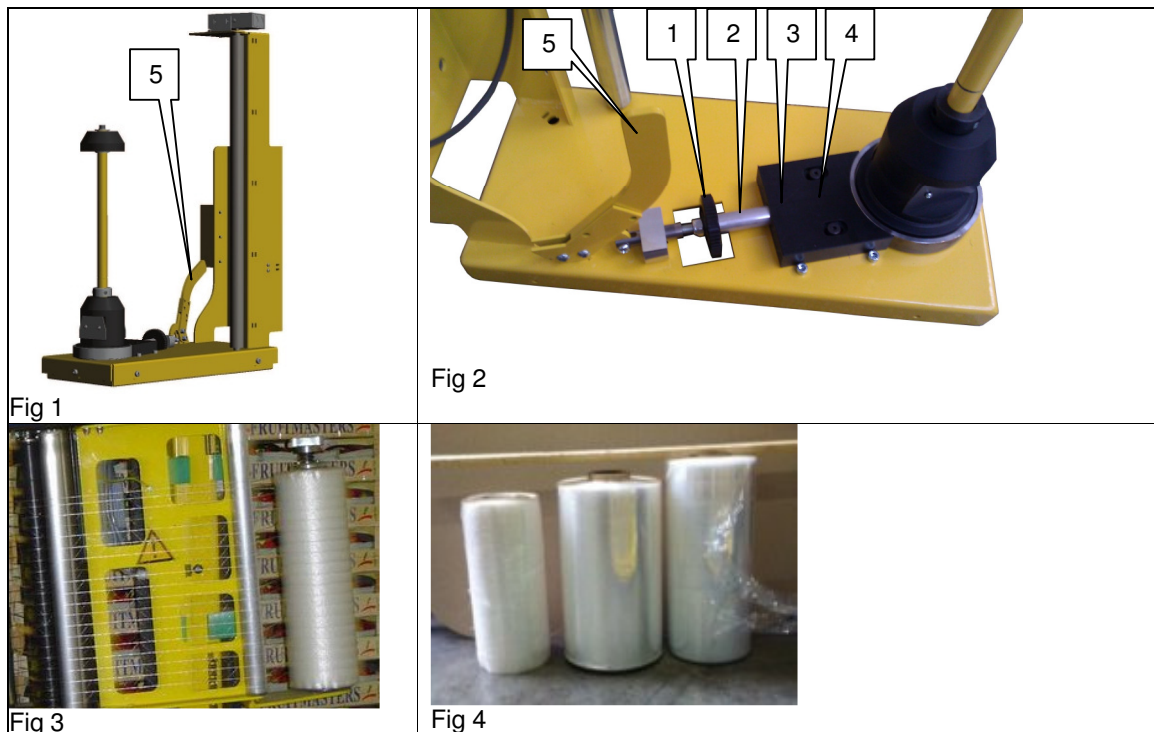

Sound level:

< 80dB with net film.
 < 80dB with cast film. (Depending on the quality)

Film:

Blown and cast film Max thickness	35mu
Recommended thickness	8 to 20mu
Max. coil diameter	250mm
Core diameter	76mm
Max. Film width	500mm