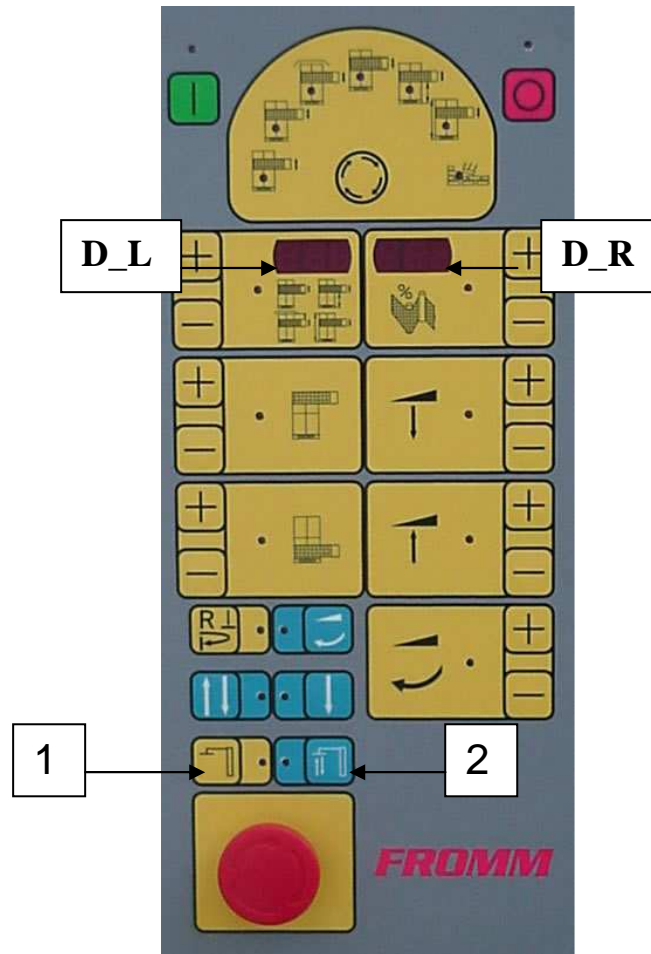


Eeprom reset **F12**

Possible EEPROM COMPLETE RESET

ONLY TO DO IN EXTREME CASES (for example no leds for the cycles, parameters with strange values ...)

Press the 2 buttons of presser for 5 seconds, **(1) + (2)** ;
 then it will appear on the displays " b_l" on the left (**D_L**)
 and " b_r" on the right (**D_R**) ;

TO RESET EEPROM Insert below values :

D_L = 59,
D_R = 46,

- Then Press STOP
- Wait 15 sec
- Turn OFF the machine
- Turn ON the machine and insert again **all the parameters**
T0-T14, F0-F6, speeds and turns, parameters of the cycles .